


Wanit Fulgurit Facade Panel Pictura

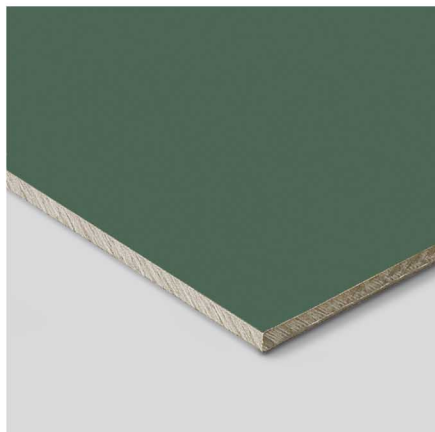

Material:	fibre cement (EN 12467)
Coating:	top-dress acrylat coating, hot film application, UV-hardened top layer
Surface:	smooth, silky matt
Format:	3,100 x 1,250 mm and 2,500 x 1,250 mm
Thicknesses:	8 and 12 mm
Colours:	15 colours
Material class:	non-combustible, A2-s1,d0 (EN 13501-1)
Application:	ventilated rainscreen cladding, Interiors

Productdescription

The new Pictura coating system is an additional surface treatment for fibre cement panels. Characteristic for this panel is the hard, smooth, silky matt surface.

The pictura surface offers a strong smooth surface providing permanent protection against many types of staining whilst providing high levels of absorption and chemical resistance.

The top layer is hardened through UV-light and offers a good protection against mechanic damages during the construction.

Graffiti protection

Whilst the Pictura surface is smooth and easily cleanable it also contributes towards graffiti protection. The UV-resistant surface incorporates a chemical resistant layer providing protection

against common aerosol and normal paints. Graffiti can be eliminated by using common graffiti remover. Never use cleaners consisting of volatile dissolver.

Fixation technics

When fixed with rivets the rivet setting tool 4x18/25 „PRO“ has to be used. The Wanit Fulgurit Facade rivets 4x18/25 K 15 have to be taken according to the general building approval.

For fixing to timber sub-construction Wanit Fulgurit facade screws 5,5 x 35/45 - K16 and sleeves have to be taken. The hole has to be diameter 7,0 mm.



Wanit Fulgurit rivet setting tool PRO

Colours

				
brown PI 941	green PI 543	brown PI 943	beige PI 842	beige PI 841
				
black PI 041	grey PI 241	grey PI 242	grey PI 243	white PI 141
				
red PI 341	green PI 541	blue PI 441	orange PI 741	green PI 542